
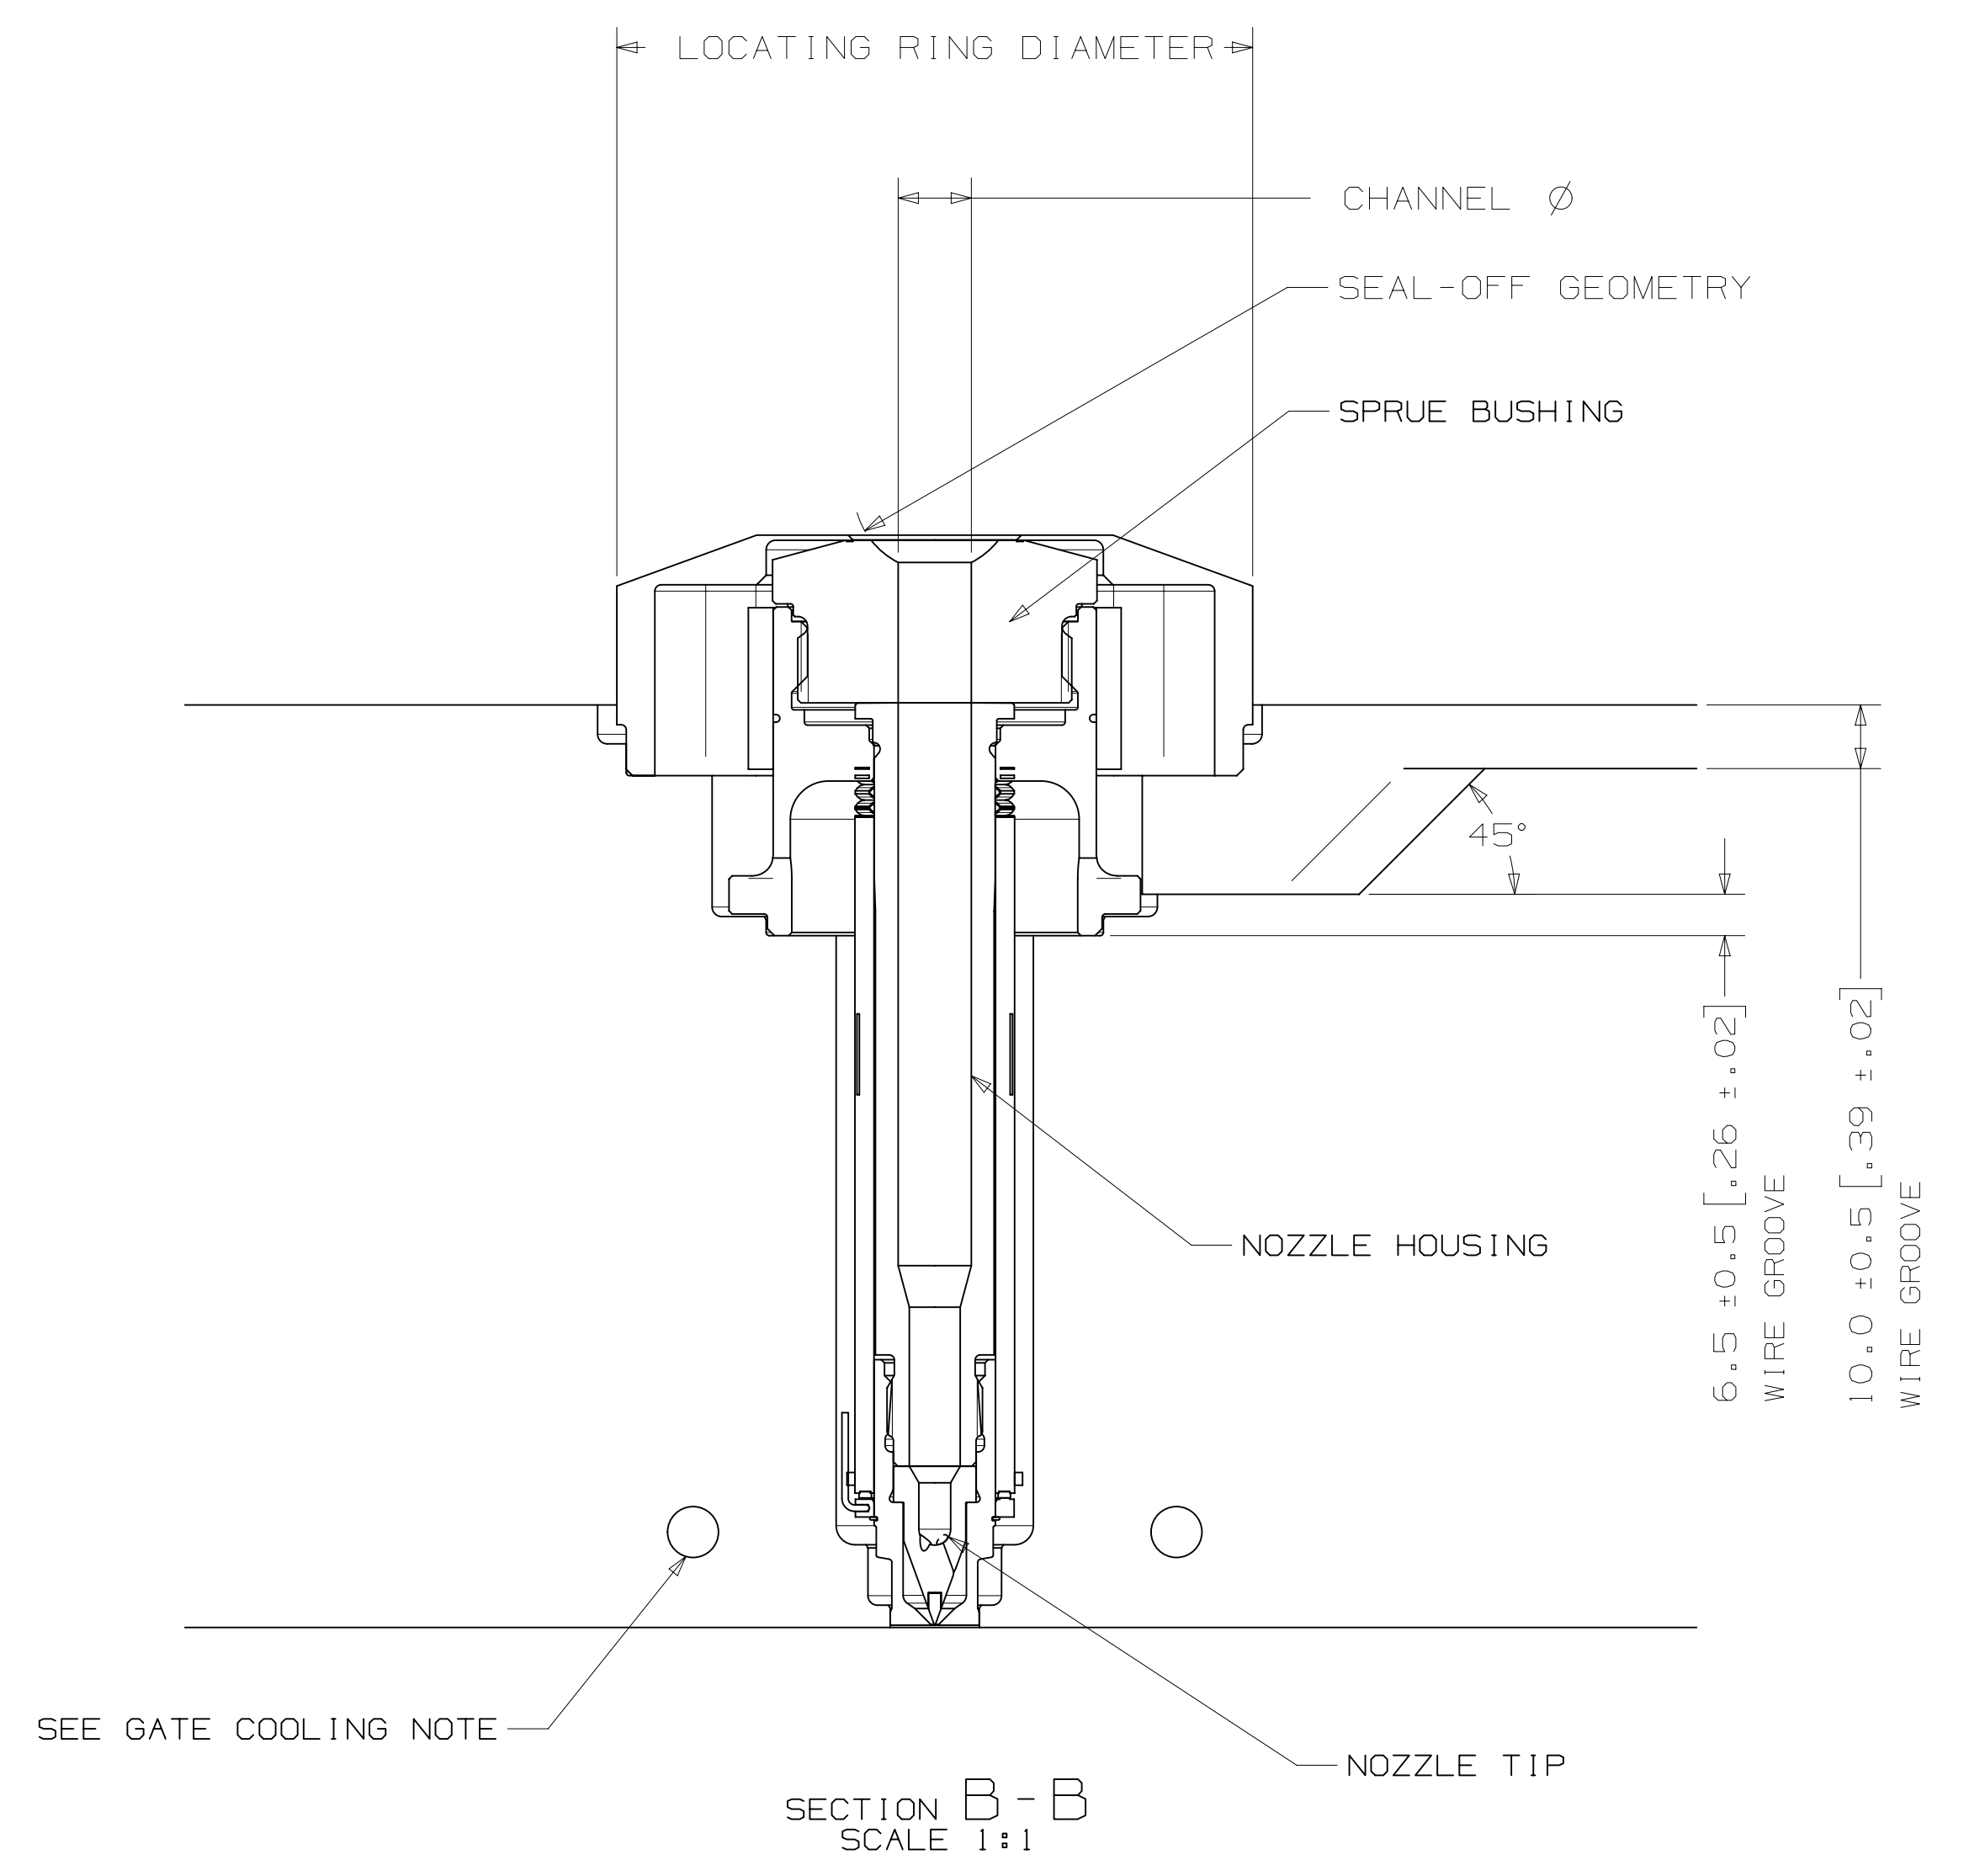
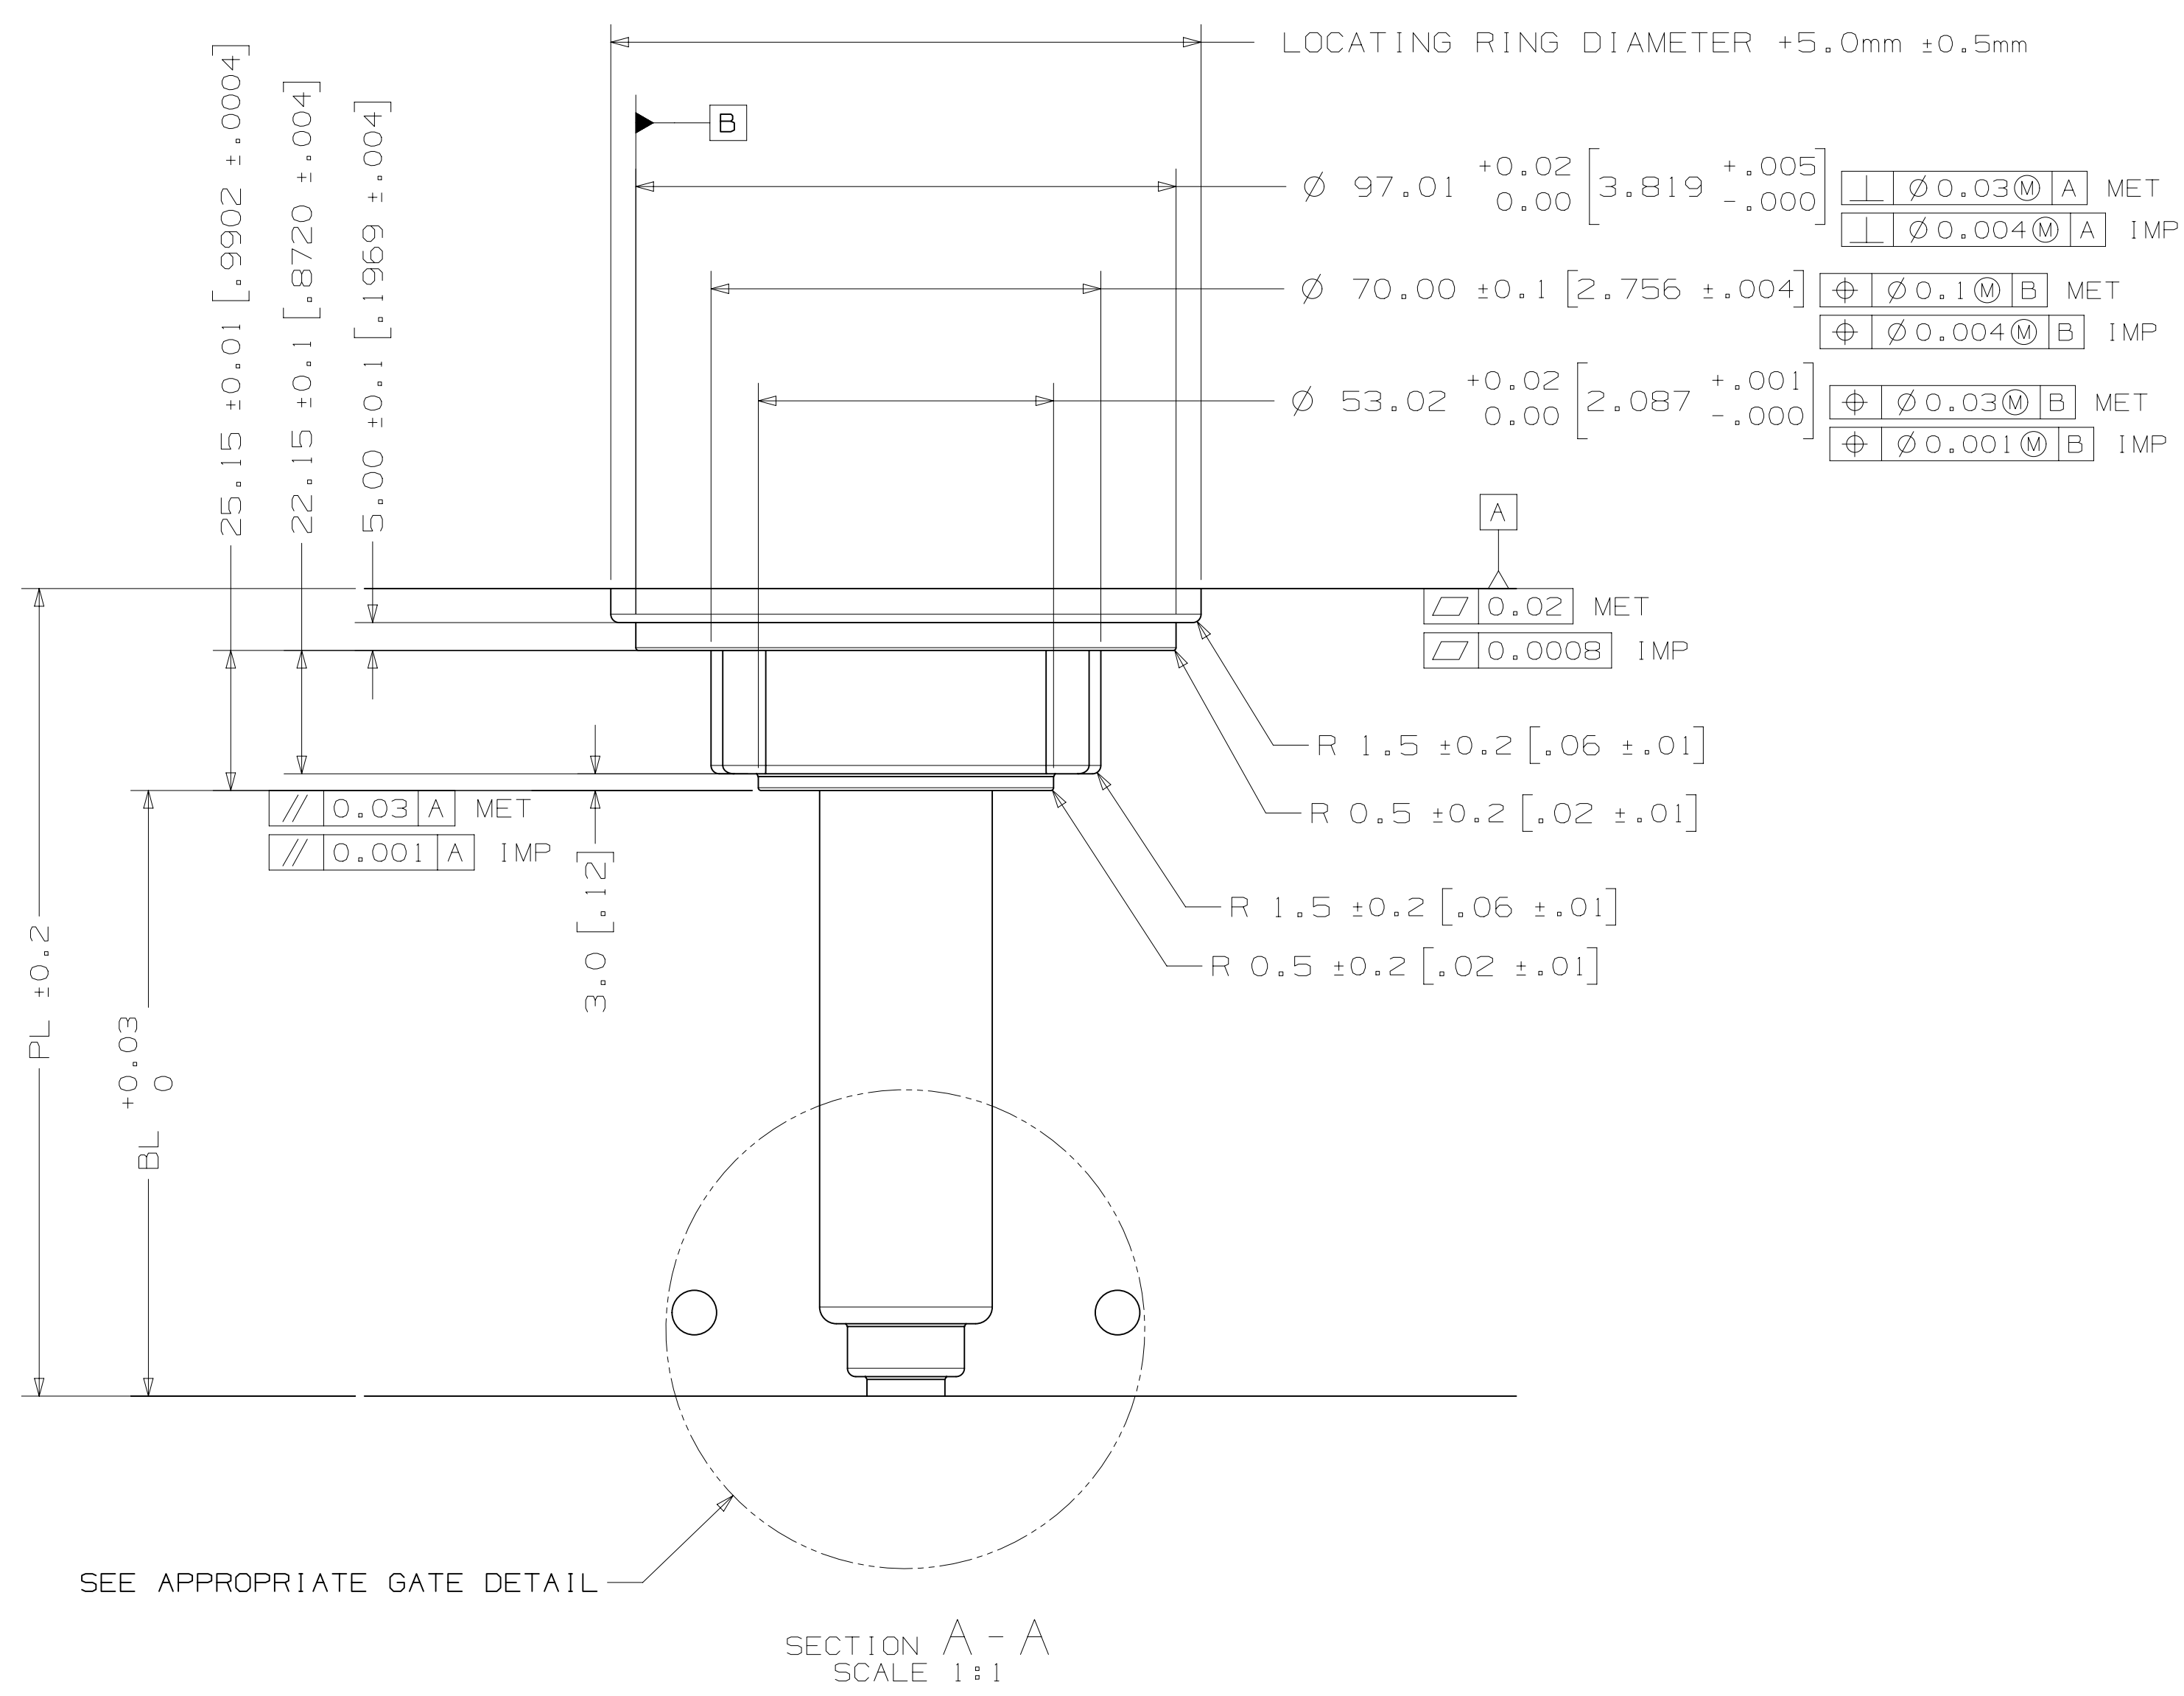


INSTALLATION DRAWING

REV: 0088142 0

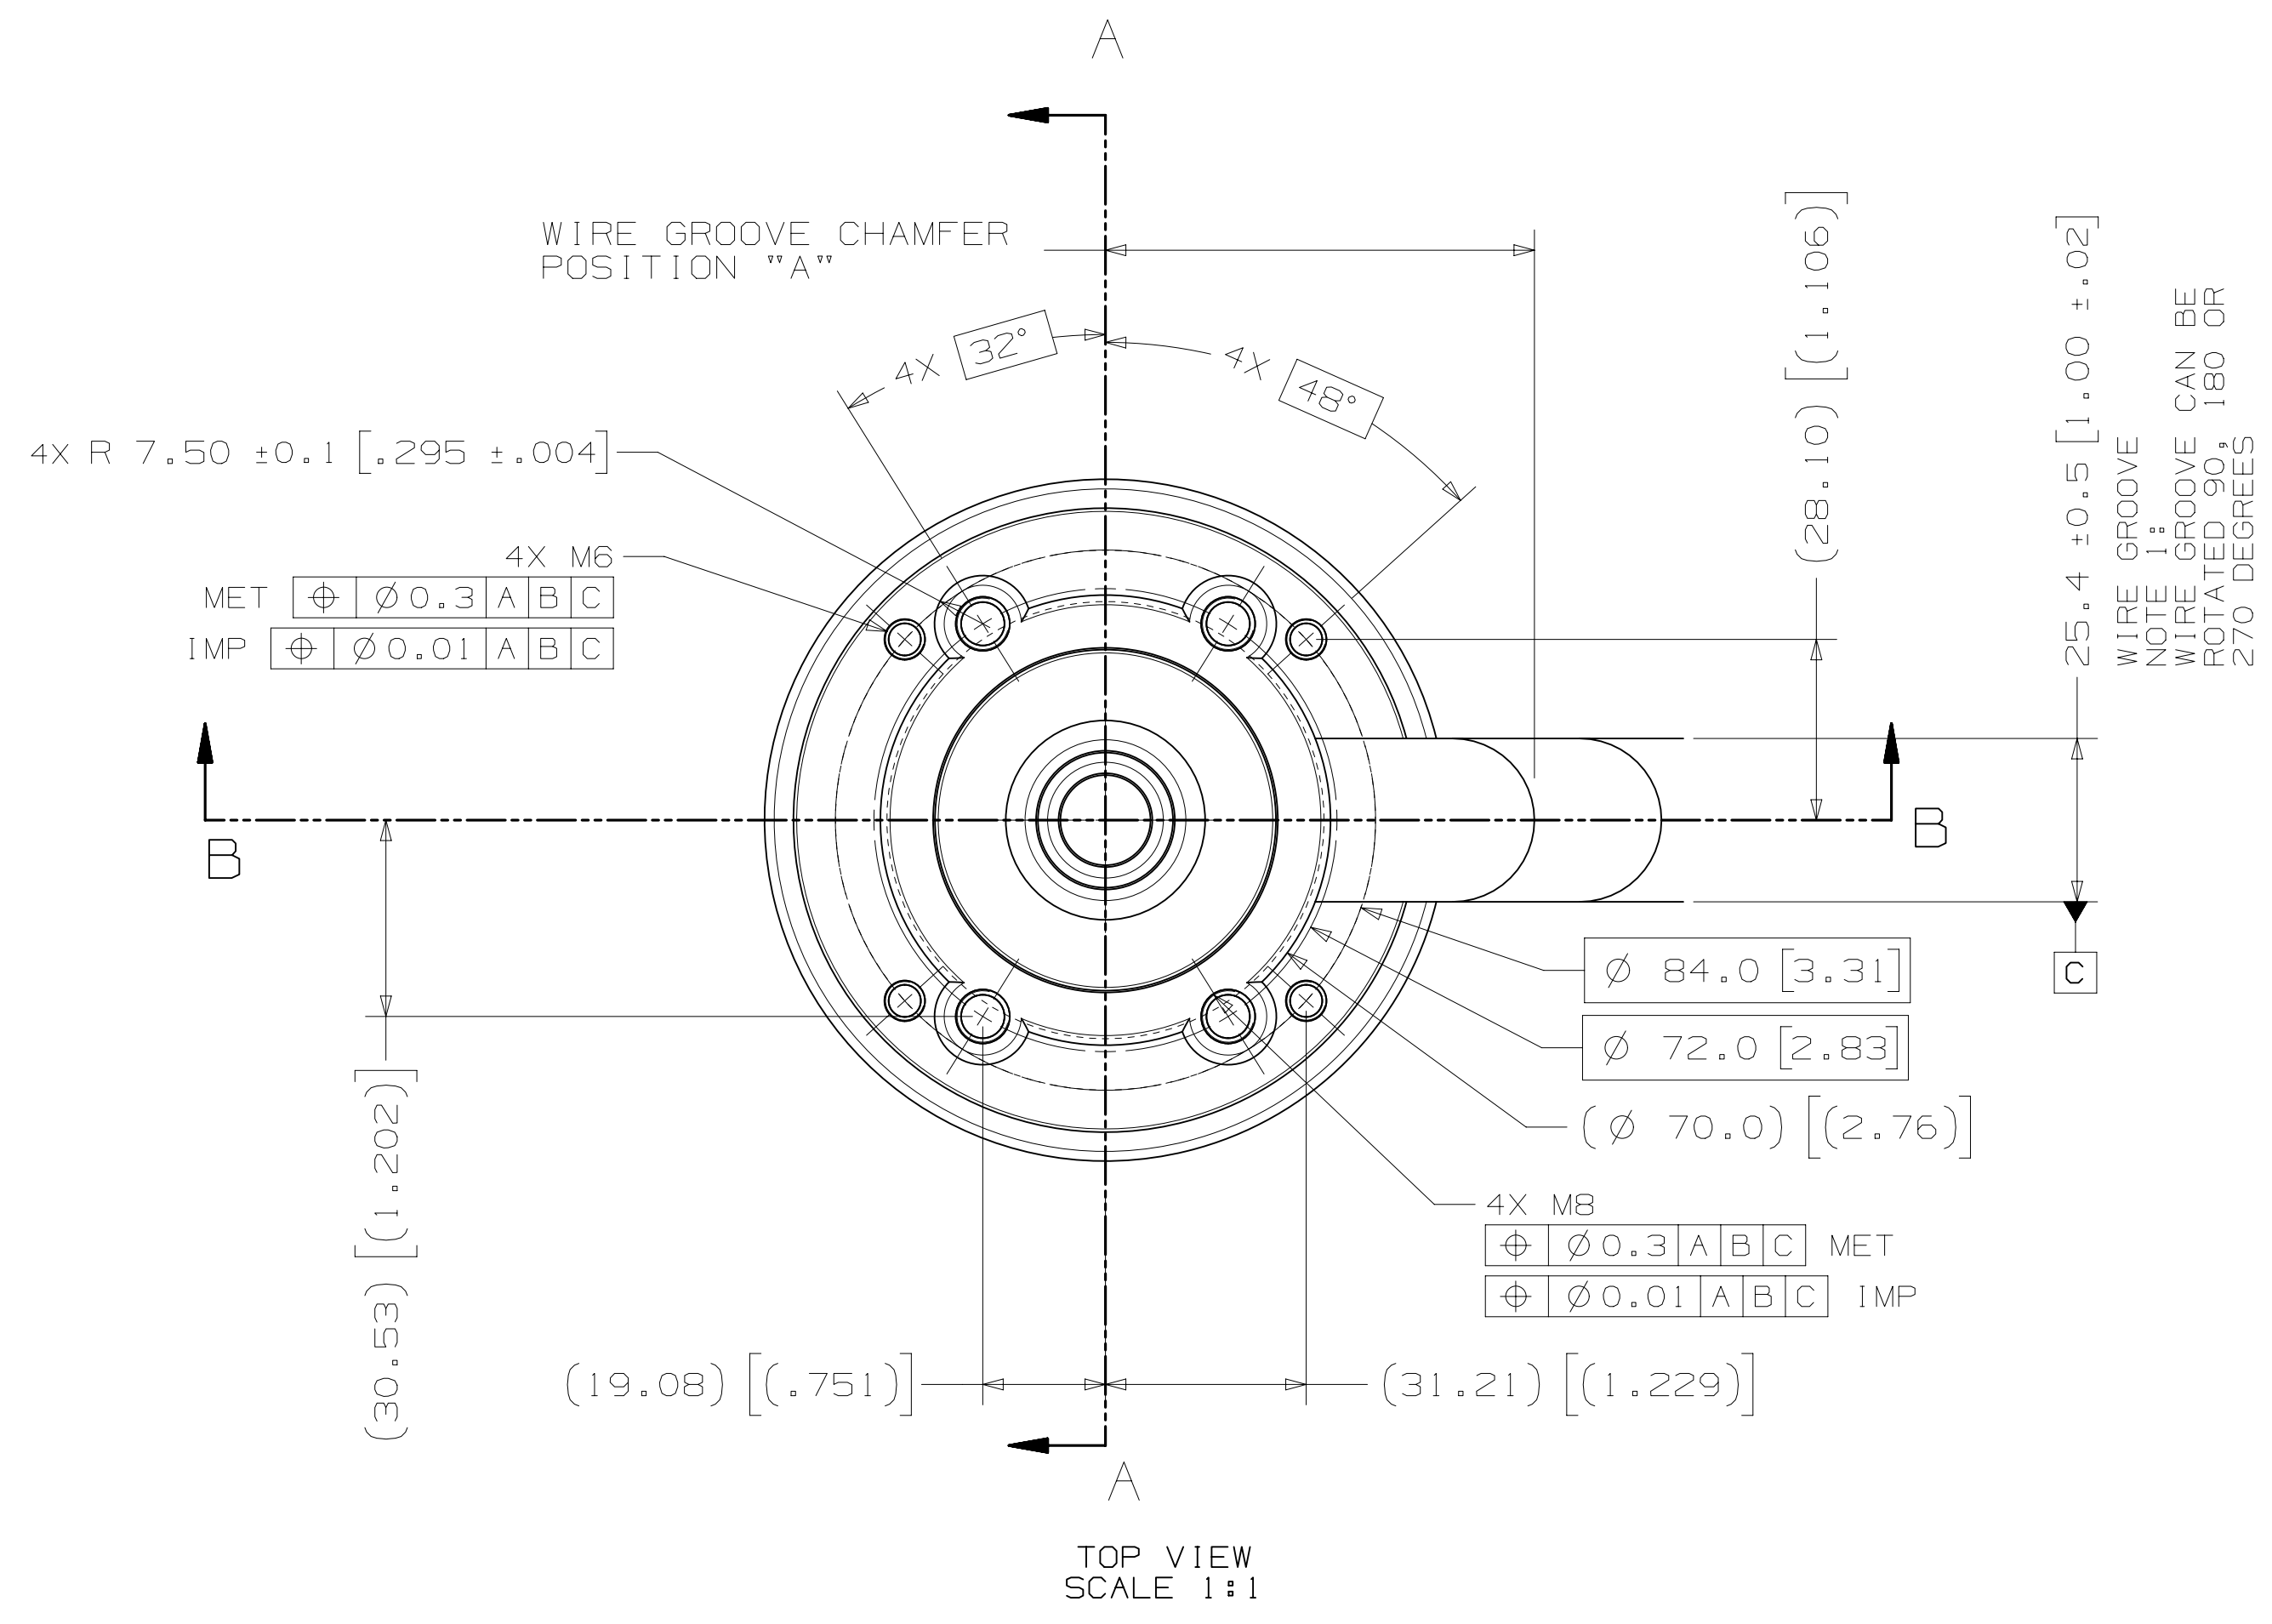

NOZZLE SERIES	NOZZLE TIP	PL RANGE	Approx. BL*
U750	HT-CAP	68.69(2.704) - 235.86(9.286)	39(1.54) - 189(7.44)

* Approx. BL VALUES IN THE TABLE ARE REFERENCES WHICH CAN DEVIATE BY +/-1mm.
FINAL BL VALUE CAN BE FOUND ON GATE DETAIL DRAWING AND 3D AFTER FINISHED DESIGN.
BL AVAILABLE IN THE INCREMENT OF 10mm WITHIN RANGE.

U750	SPRUE BUSHING	
	SEAL-OFF GEOMETRY	CHANNEL Ø
	SPHERICAL RADIUS	IN - OUT
	FLAT	4 - 11.5
	SEAL-OFF 12.7 (1/2")	11.5-THRU
	SEAL-OFF 15.5	
SEAL-OFF 19.05 (3/4")		
SEAL-OFF 20		
	SEAL-OFF 40	

U750	LOCATING RING DIAMETER	WIRE GROOVE CHAMFER POSITION "A" (±2.0)
	100mm	66.7
	101.3mm (3.99")	66.7
	125mm	78.7

RECOMMENDED GATE COOLING GUIDELINES
ADEQUATE COOLING IS ESSENTIAL FOR THE PROPER FUNCTION OF THIS SYSTEM. REFER TO THE HOT RUNNER PRODUCT GUIDE FOR MORE DETAILED GUIDELINES.
www.husky-co.com

RECOMMENDED GATE MATERIAL
NOTE: THESE MATERIALS MAY NOT OFFER THE DESIRED RESISTANCE TO ABRASIVE AND/OR CORROSIVE RESINS, FILLERS AND/OR ADDITIVES
A151 H13 (49-5) Rc1
A151 420 (49-5) Rc1

RECOMMENDED GATE MANUFACTURING GUIDELINES


- HARDENED GATE INSERTS (49-5) ARE RECOMMENDED WHEN USING SOFTER CAVITY STEELS. SOFTER CAVITIES MAY BE ACCEPTABLE FOR CERTAIN APPLICATIONS. CONTACT YOUR HUSKY REPRESENTATIVE WITH QUESTIONS.
- EDM'ING THE GATE AREA CAUSES MICRO CRACKS WHICH LEAD TO BRITTLE GATE FAILURES. ALSO - DO NOT EDM THE MOLDING SURFACE WITHIN 2mm OF THE GATE HOLE.
- MACHINE THE GATE HOLE AFTER HARDENING TO AVOID EXCESSIVE QUENCH IN THE THIN SECTION DURING HEAT TREAT & RESULTING OVERHARDENING IN THE GATE AREA.
- RECESSED GATES ON THE PRODUCT REDUCE THE GATE AREA STRENGTH LEADING TO GATE FAILURES.
- WELDING THE GATE AREA INCREASES STRESSES AT THE GATE, SOFTENS THE AREA AROUND THE WELD AND CAN CAUSE GATE FAILURES.

REV	DATE	DESCRIPTION	NAME
5	2020-05-29	TABLE UPDATED PER LATEST CALCULATION	DRWNI DEEBAN N T
4	2019-07-09	TEMPLATE VALUES UPDATED AS PER SOL 2.0	DRWNI MURALIDHARAN
3	2019-02-05	SINGLE CAVITY NAMEPLATE REMOVED	DRWNI ARUN
2	2018-05-20	DRAWING NAME CHANGED	DRWNI ANSHAL
0	2017-09-04	ORIGINAL ISSUE - DESIGNED BY: DHANALEKIAN	DRWNI DHANALEKIAN
			CHKDI PICHLER KLAUS

COST PER KGM: 114.50-124.00 AND HEAVY ALUMINUM: 150.00 MASS OPTIMIZED SPECIFIED CAD MODEL TO BE USED NEW TOLERANCES/WORKING ARE BASIC GENERAL TOLERANCES: 0.10-0.15 BROKEN EDGES/CHAMFERS: 1.0 ± 0.2 X 45° FILLET/RADIUS: R0.8 ± 0.2 SURFACE FINISH: Ra 3.2	FOR TORQUE SPECIFICATIONS, REFER TO HS 252	METRIC	TITLE: HOT SPRUE U750-HT-CAP
WEIGHT: - kg SCALE: 1 OF 2 SHEET: 8088142 REV: 0	RECOMMENDED GATE COOLING GUIDELINES ADEQUATE COOLING IS ESSENTIAL FOR THE PROPER FUNCTION OF THIS SYSTEM. REFER TO THE HOT RUNNER PRODUCT GUIDE FOR MORE DETAILED GUIDELINES. www.husky-co.com		

ASSEMBLY DRAWING

DRAWING 8088142 REV 0

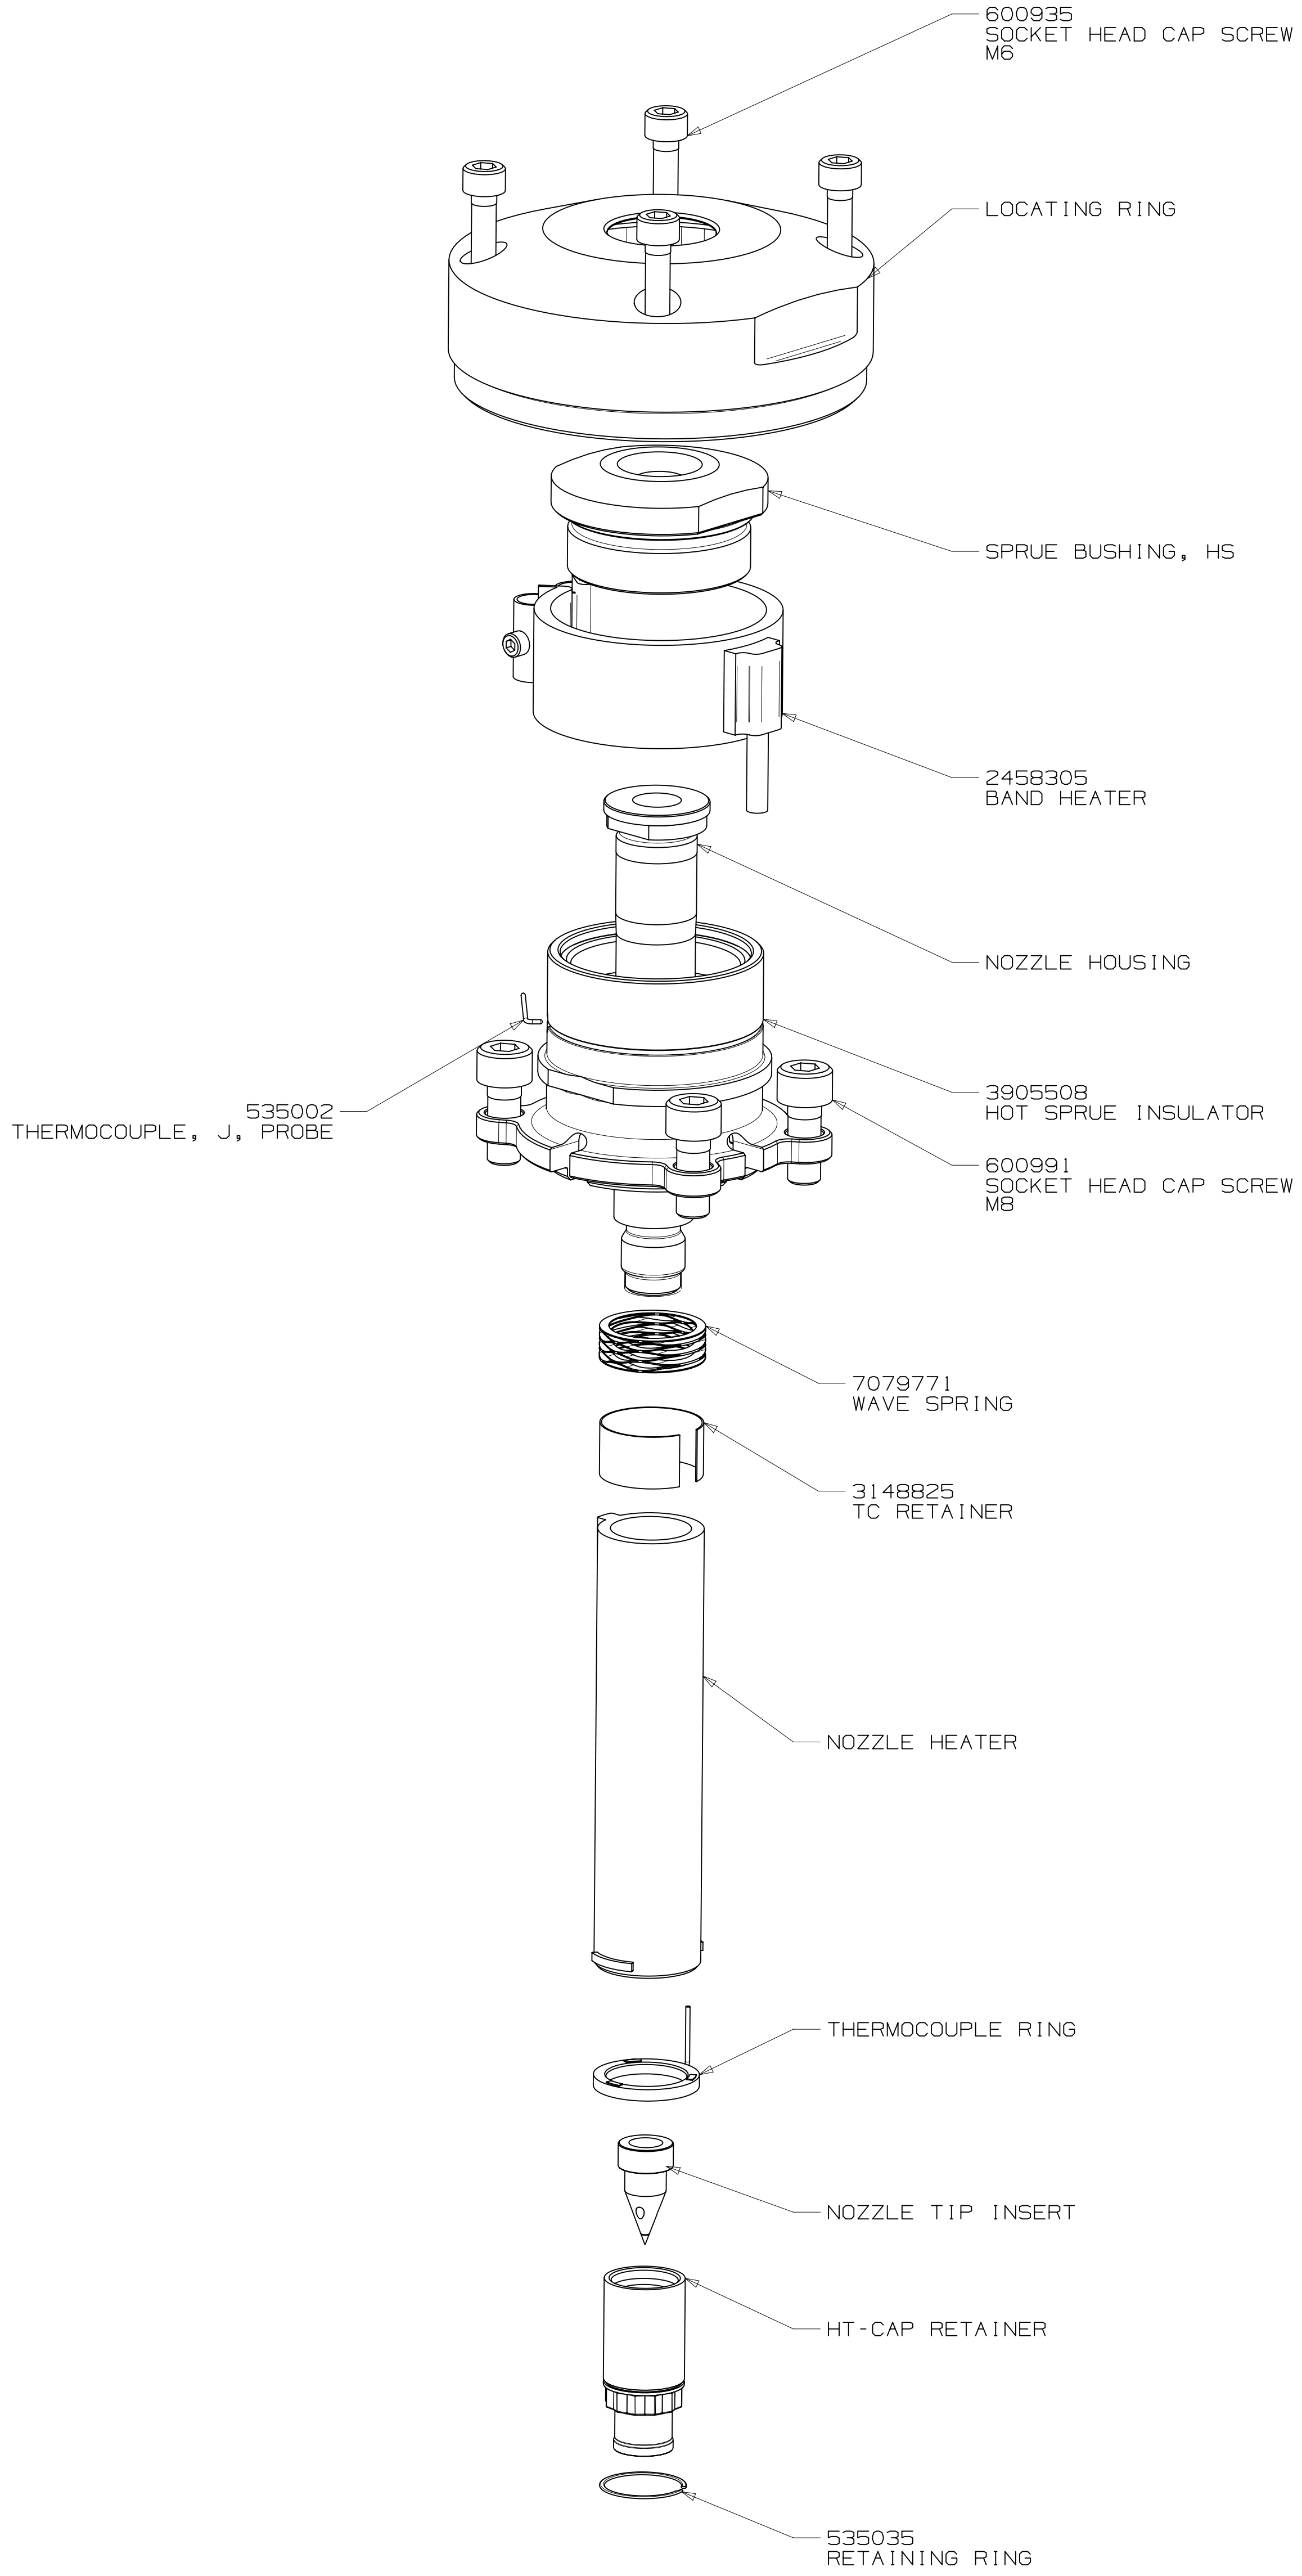

EXPLODED VIEW
SCALE 1:1

UNLESS OTHERWISE SPECIFIED
TORQUE TO HUSKY SPECIFICATION
HS 252

PRELOAD CLASS HGT-80		
SIZE	Nm	lb-ft
#8	5	4
#10	7	5
1/4	16	12
5/16	35	25
3/8	60	45
7/16	95	70
1/2	150	110
5/8	290	210
3/4	500	360
7/8	790	580
1	1180	865
M4	4.6	3.4
M5	9.5	7.1
M6	16	12
M8	39	29
M10	77	57
M12	135	100
M14	215	160
M16	330	245
M20	650	480
M24	1100	810

ELECTRICAL INFO (240 VAC)	
ZONE	ZONE DESCRIPTION
1	SPRUE BODY
2	NOZZLE TIP
T/C LEADS: WHITE = (+) RED = (-)	
RECOMMENDED GATE COOLING GUIDELINES ADEQUATE COOLING IS ESSENTIAL FOR THE PROPER FUNCTION OF THIS SYSTEM. REFER TO THE HOT RUNNER PRODUCT GUIDE FOR MORE DETAILED GUIDELINES. www.husky.cc	
RECOMMENDED GATE MATERIAL NOTE: THESE MATERIALS MAY NOT OFFER THE DESIRED RESISTANCE TO ABRASIVE AND/OR CORROSIVE RESINS, FILLERS AND/OR ADDITIVES AISI H13 (49-51 Rc) AISI 420 (49-51 Rc)	
RECOMMENDED GATE MANUFACTURING GUIDELINES	
<ul style="list-style-type: none"> - HARDENED GATE INSERTS (49-51) ARE RECOMMENDED WHEN USING SOFTER CAVITY STEELS. SOFTER CAVITIES MAY BE ACCEPTABLE FOR CERTAIN APPLICATIONS. CONTACT YOUR HUSKY REPRESENTATIVE WITH QUESTIONS. - EDM'ING THE GATE AREA CAUSES MICRO CRACKS WHICH LEAD TO BRITTLE GATE FAILURES. ALSO - DO NOT EDM THE MOLDING SURFACE WITHIN 2mm OF THE GATE HOLE. - MACHINE THE GATE HOLE AFTER HARDENING TO AVOID EXCESSIVE QUENCH IN THE THIN SECTION DURING HEAT TREAT & RESULTING OVERHARDENING IN THE GATE AREA. - RECESSED GATES ON THE PRODUCT REDUCE THE GATE AREA STRENGTH LEADING TO GATE FAILURES. - WELDING THE GATE AREA INCREASES STRESSES AT THE GATE, SOFTENS THE AREA AROUND THE WELD AND CAN CAUSE GATE FAILURES. 	

REV	DATE	DESCRIPTION	NAME
5	2020-05-29	TABLE UPDATED PER LATEST CALCULATION	DRWN: DEEBAN N T CHKD:
4	2019-07-09	TEMPLATE VALUES UPDATED AS PER SCL 2.0	DRWN: MURALIDHARAN CHKD:
3	2019-02-05	SINGLE CAVITY NAMEPLATE REMOVED	DRWN: ARUN CHKD:
2	2018-06-20	DRAWING NAME CHANGED	DRWN: ANUSHAL CHKD:
0	2017-09-04	ORIGINAL ISSUE - DESIGNED BY: DHANANJAYAN	DRWN: DHANANJAYAN CHKD: PICHLER KLAUS

FOR TORQUE SPECIFICATIONS, REFER TO HS 252	METRIC THIS DRAWING AND INFORMATION CONTAINED WITHIN IS CONFIDENTIAL AND/OR PROPRIETARY TO HUSKY INJECTION MOLDING SYSTEMS LTD. OR ONE OF ITS SUBSIDIARIES. IT IS NOT TO BE COPIED, DISCLOSED OR USED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF HUSKY. NO INTELLECTUAL PROPERTY RIGHTS ARE GRANTED INCLUDING ANY LICENSE IMPLIED OR OTHERWISE. ALL RIGHTS RESERVED. COPYRIGHT 2017 HUSKY.	TITLE HOT SPRUE U750-HT-CAP
WEIGHT - kg	SCALE NONE SIZE AIR	DRAWING 8088142 REV 0
SHEET 2 OF 2		DRAWING 8088142 REV 0