



INSTALLATION DRAWING

REV 0
8146855

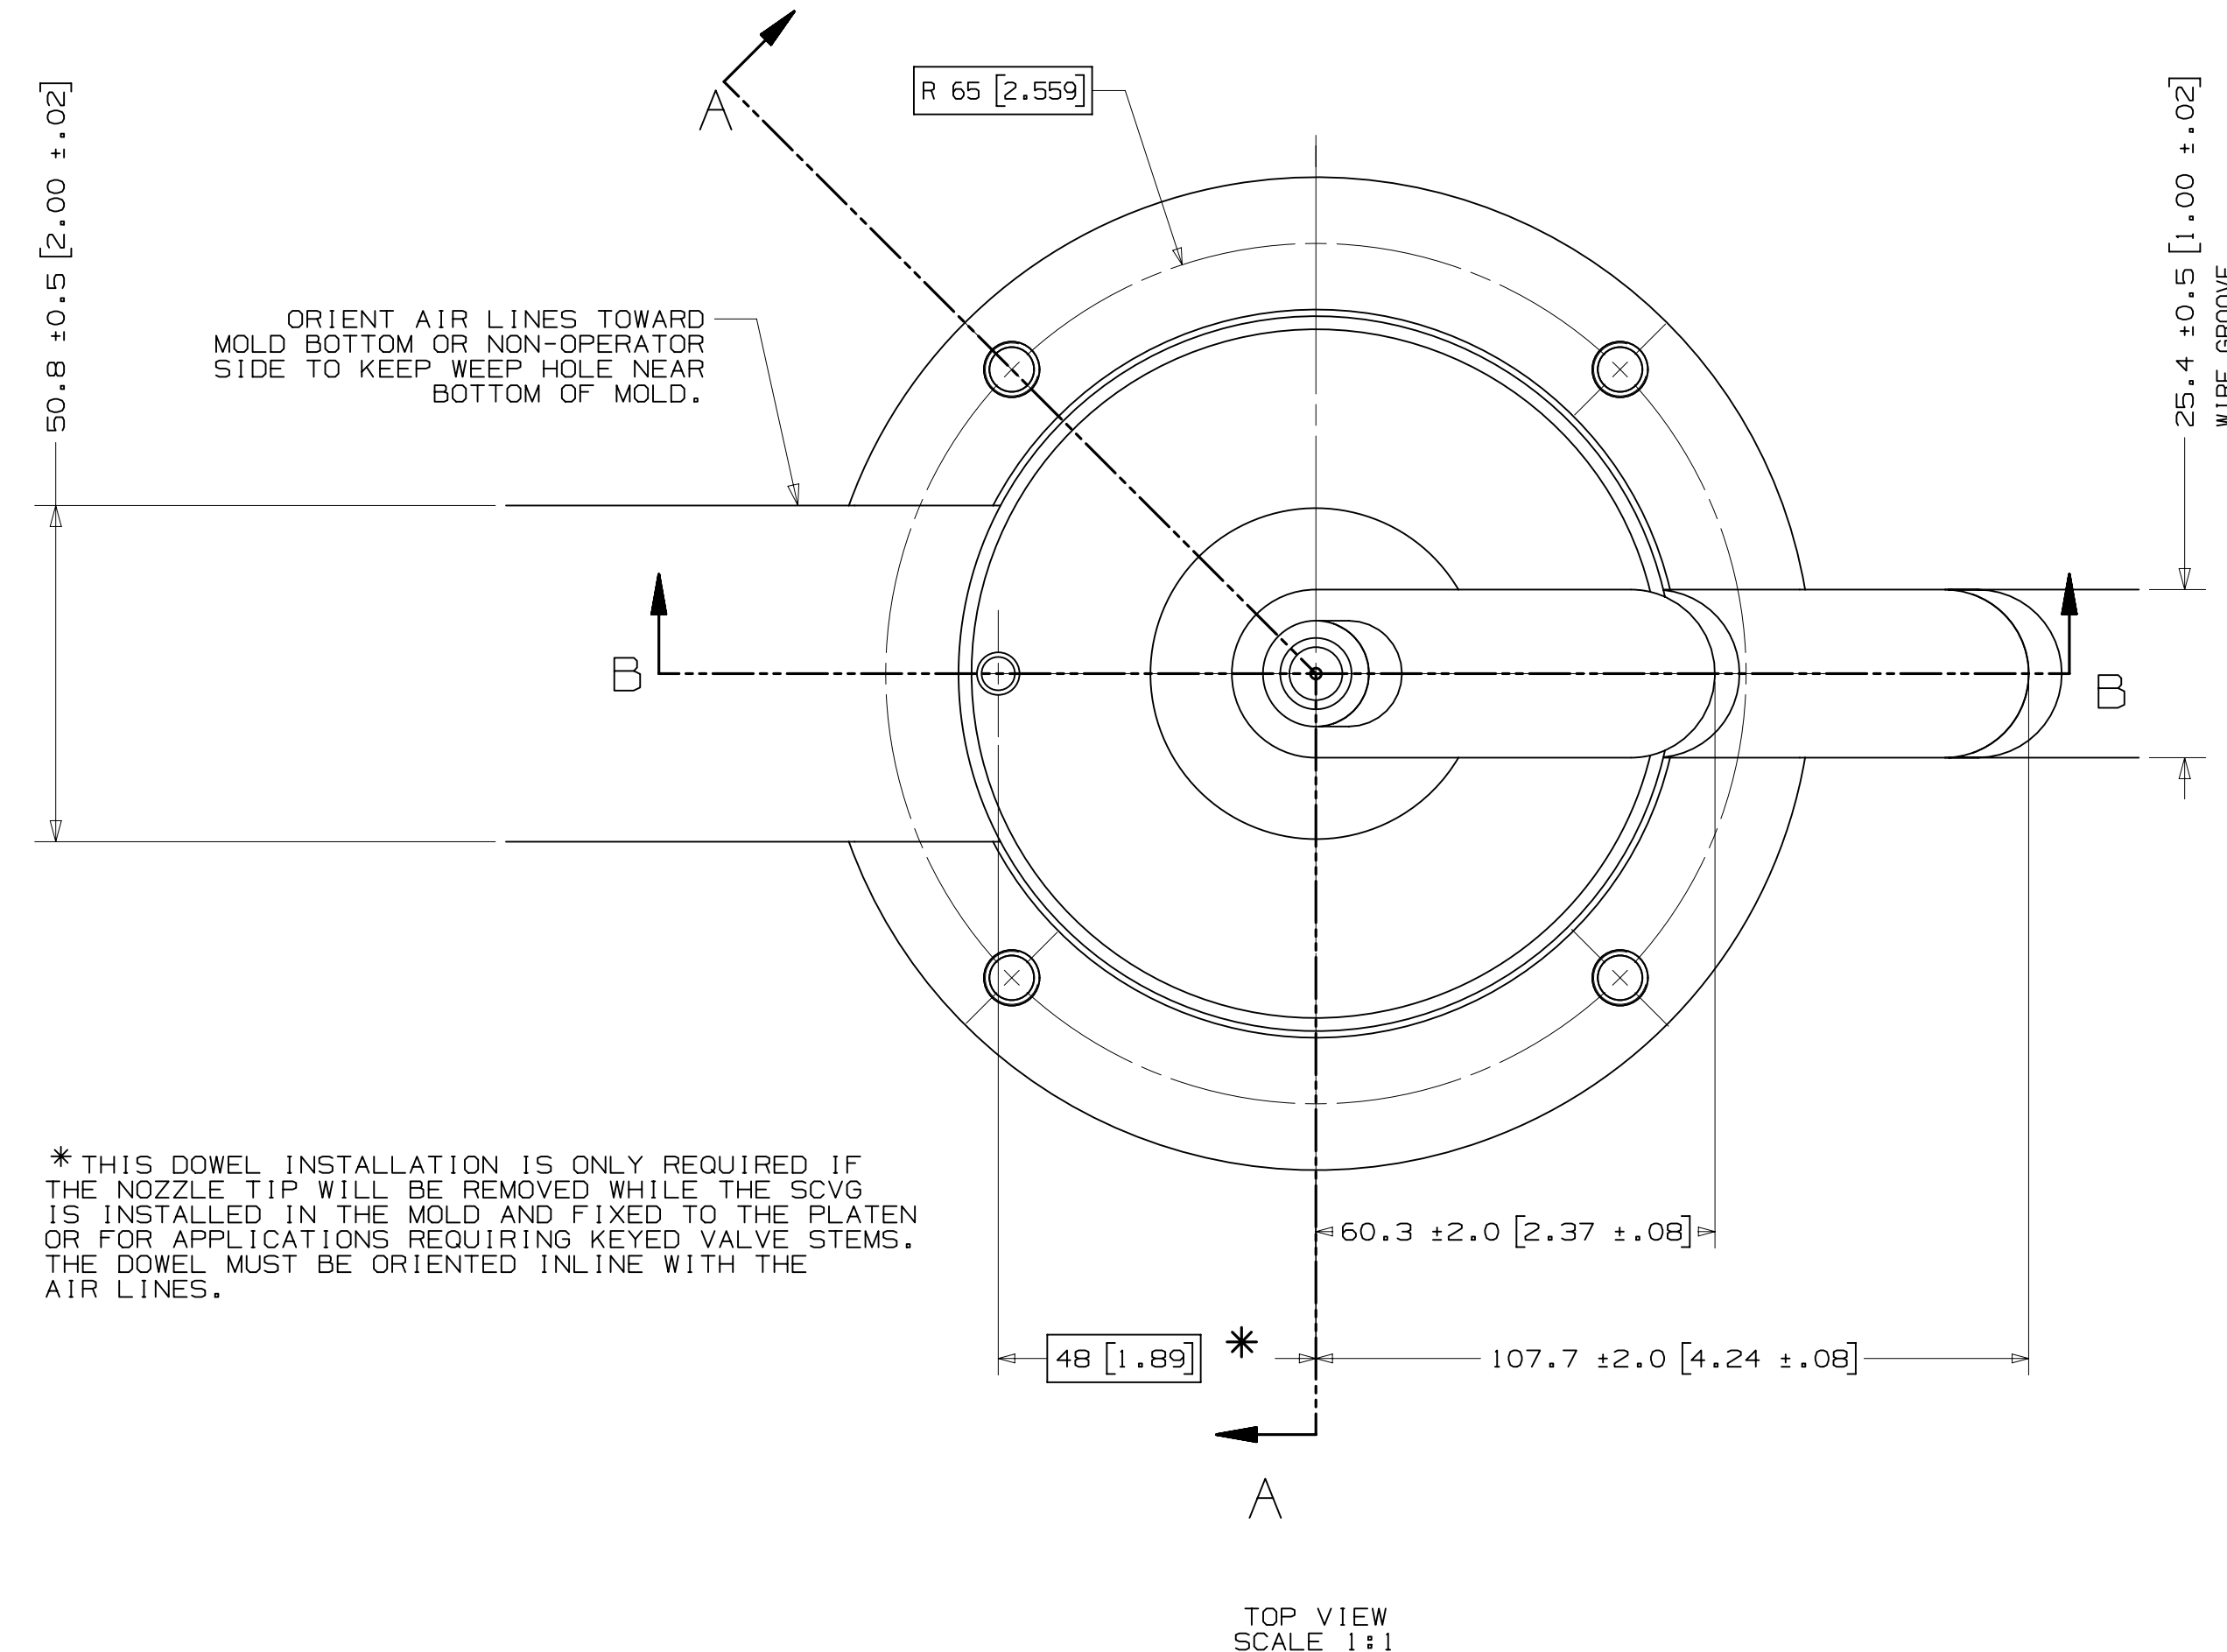


*THIS DOWEL INSTALLATION IS ONLY REQUIRED IF THE NOZZLE TIP WILL BE REMOVED WHILE THE SCVG IS INSTALLED IN THE MOLD AND FIXED TO THE PLATEN OR FOR APPLICATIONS REQUIRING KEYS VALVE STEMS. THE DOWEL MUST BE ORIENTED IN LINE WITH THE AIR LINES.

TOP VIEW
SCALE 1:1

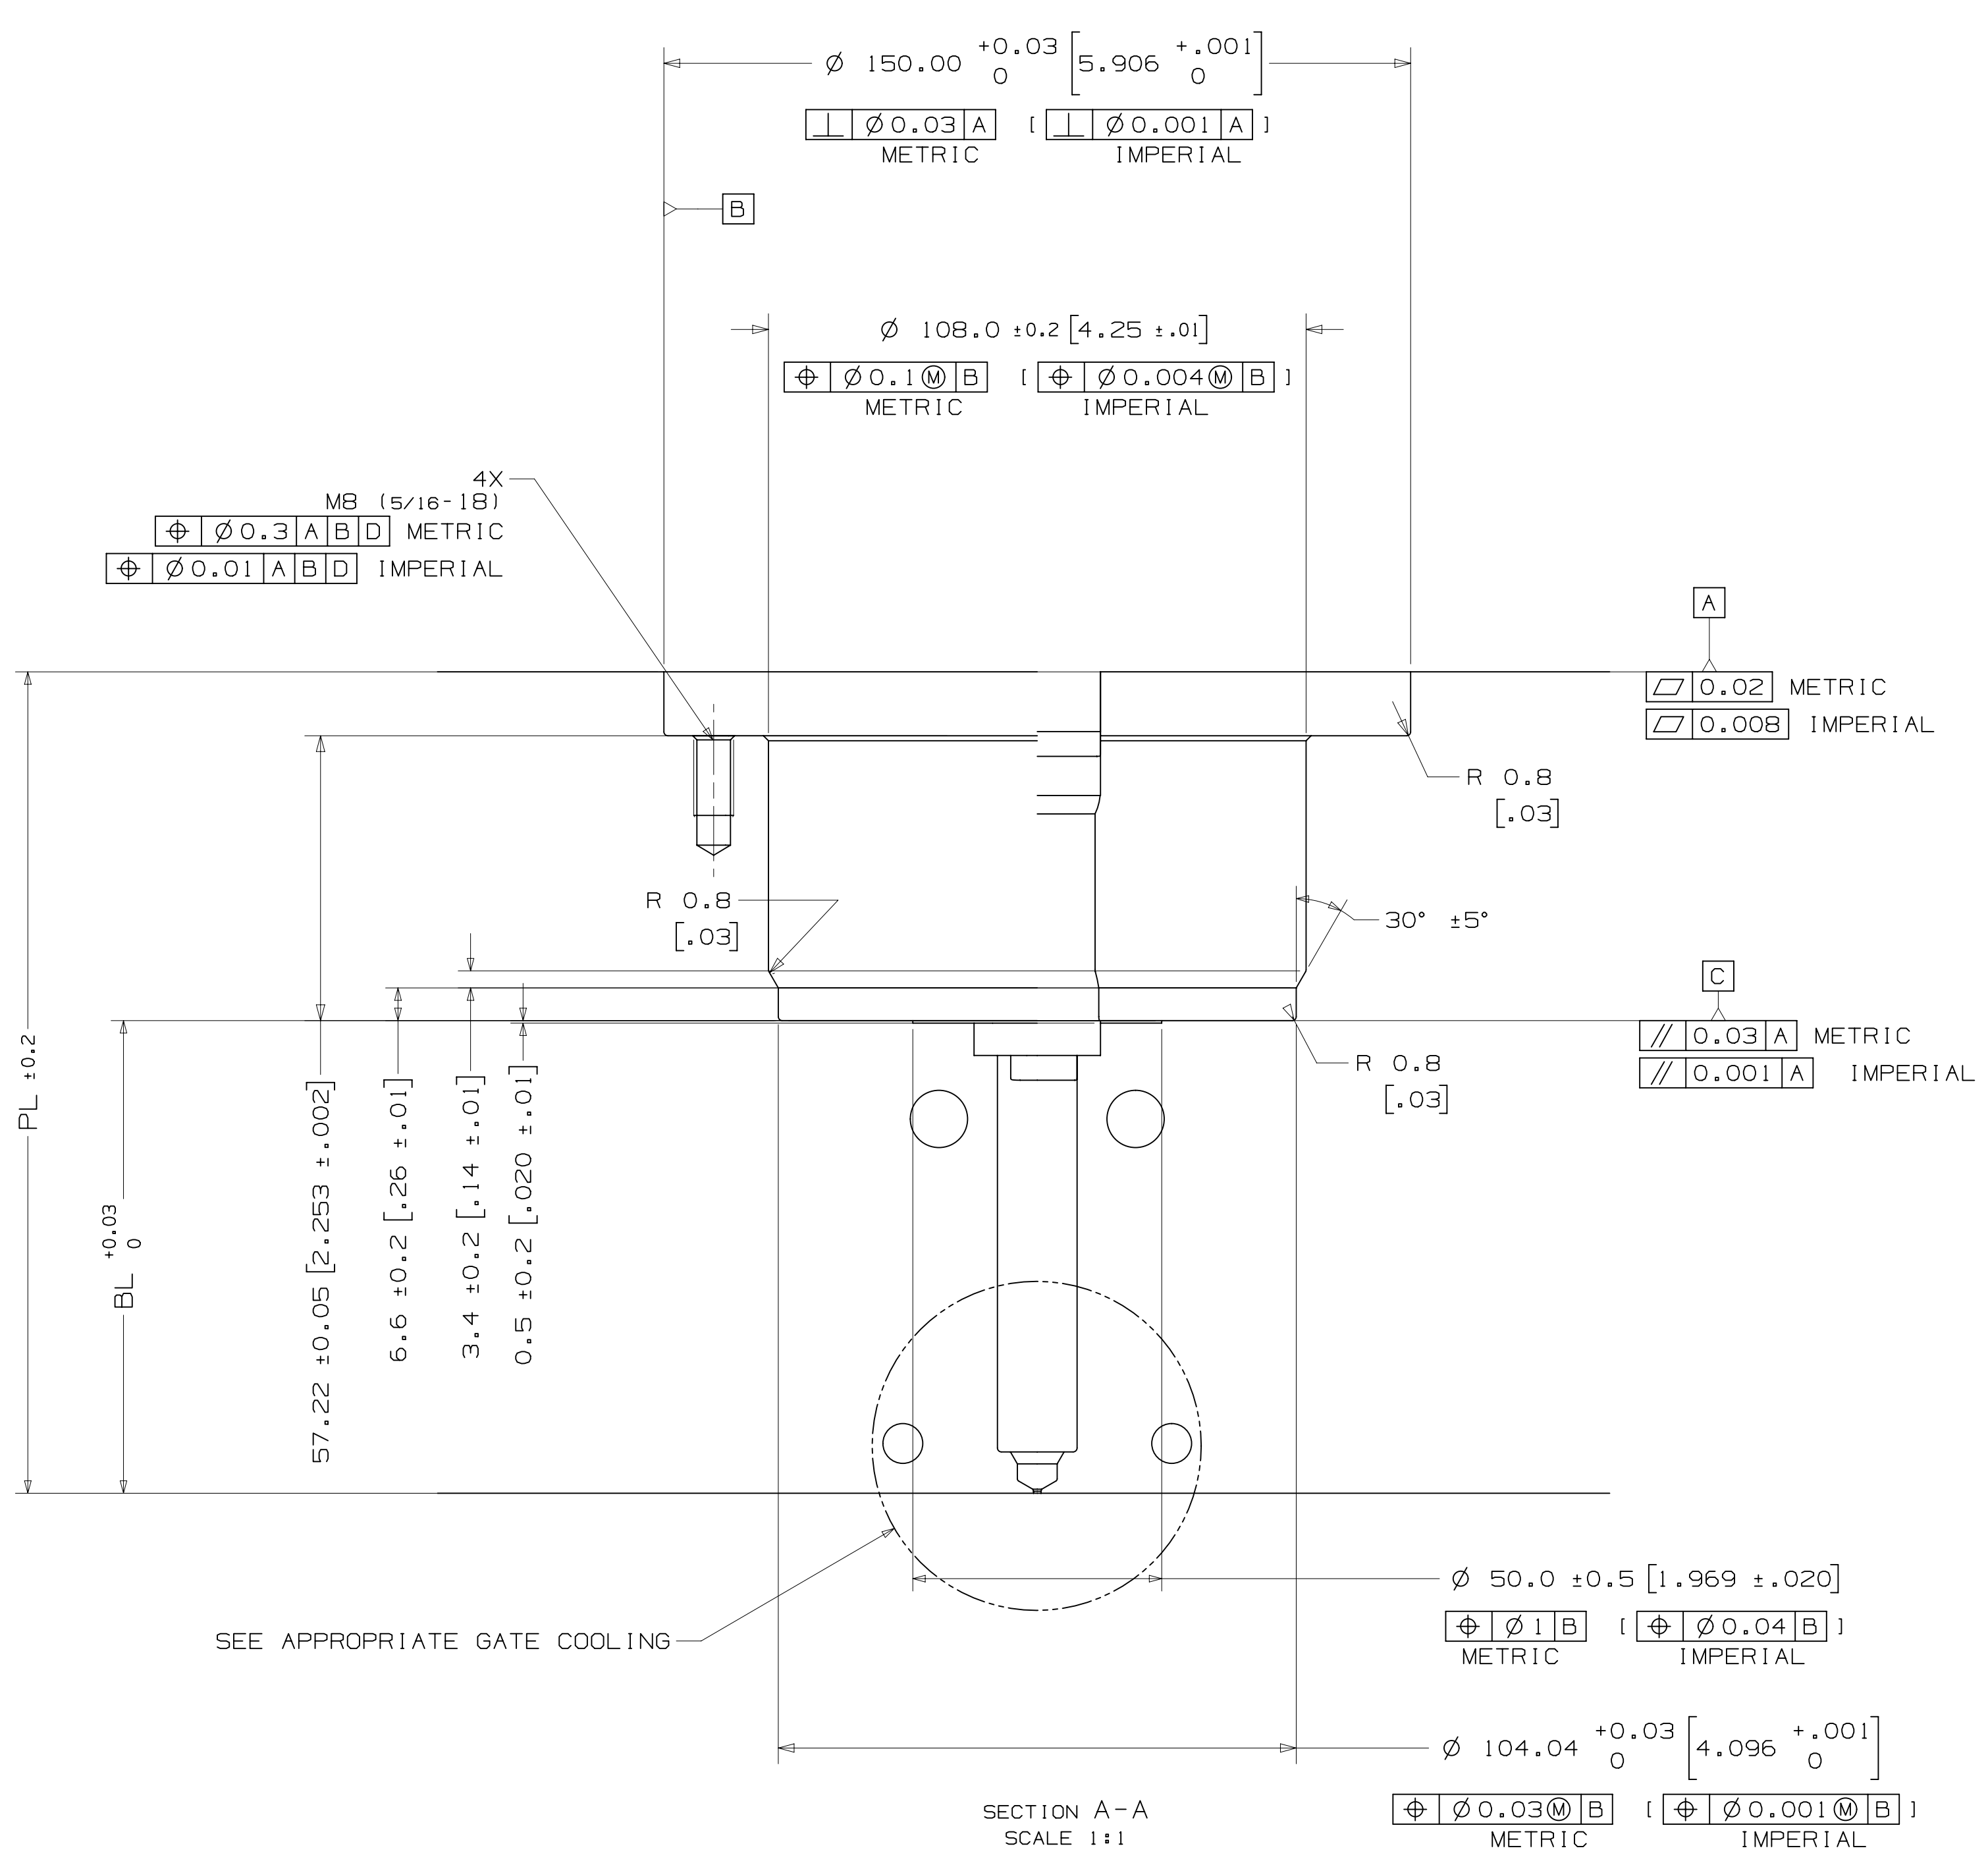

SECTION A-A
SCALE 1:1

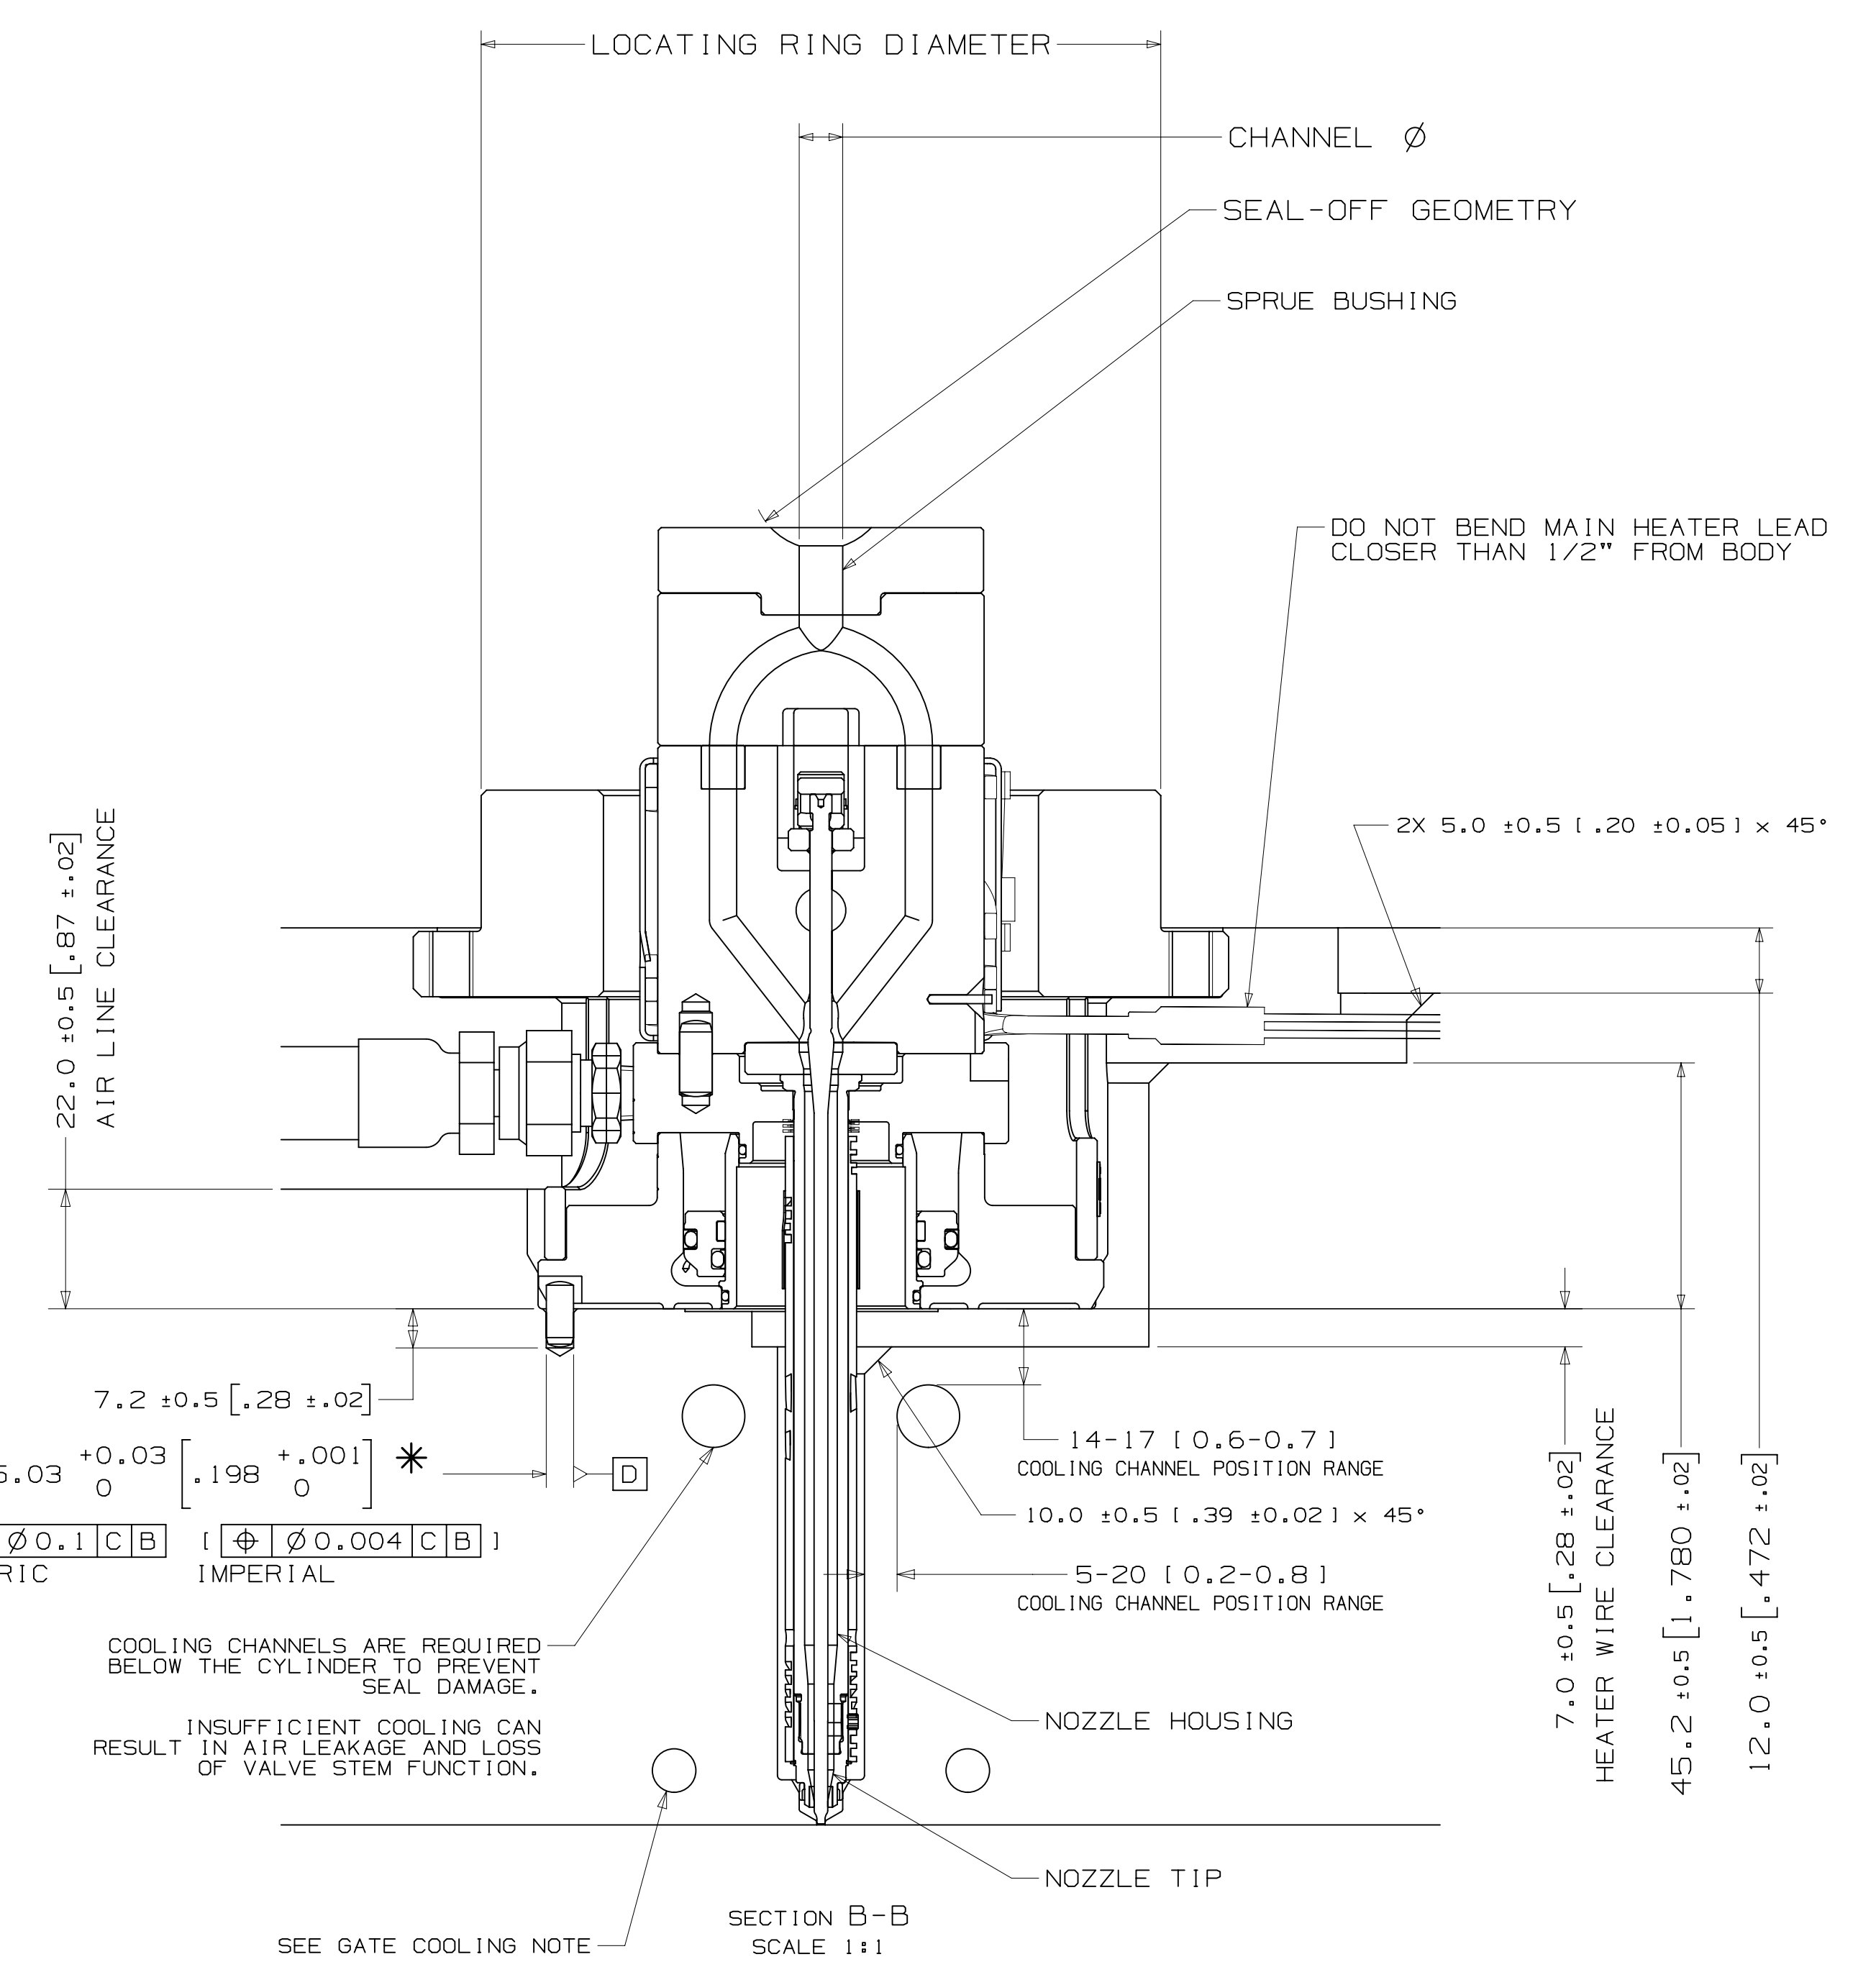

SECTION B-B
SCALE 1:1

NOZZLE SERIES	NOZZLE TIP	PL RANGE	Approx. BL
U350	VG	94,24(3,710) - 244,58(9,629)	25(0,98) - 165(6,50)

*Approx. BL VALUES IN THE TABLE ARE REFERENCES WHICH CAN DEVIATE BY +/-1mm. FINAL BL VALUE CAN BE FOUND ON GATE DETAIL DRAWING AND 3D AFTER FINISHED DESIGN. BL AVAILABLE IN THE INCREMENT OF 10mm WITHIN RANGE.

U350	SPRUE BUSHING	
	SEAL-OFF GEOMETRY	CHANNEL Ø IN - OUT
	FLAT	4 - 8
	FLAT	8 - THRU
	SEAL-OFF 12.7 (1/2")	
	SEAL-OFF 15.5	
	SEAL-OFF 19.05 (3/4")	
	SEAL-OFF 20	
	SEAL-OFF 40	

U350	LOCATING RING DIAMETER	
	100mm	
101.3mm (3.99")		
125mm		

RECOMMENDED GATE COOLING GUIDELINES
ADEQUATE COOLING IS ESSENTIAL FOR THE PROPER FUNCTION OF THIS SYSTEM. REFER TO THE HOT RUNNER PRODUCT GUIDE FOR MORE DETAILED GUIDELINES.
www.husky.co

RECOMMENDED GATE MATERIAL
NOTE: THESE MATERIALS MAY NOT OFFER THE DESIRED RESISTANCE TO ABRASIVE AND/OR CORROSIVE RESINS, FILLERS AND/OR ADDITIVES.
AISI H13 (49-51 Rc)
AISI 420 (49-51 Rc)



RECOMMENDED GATE MANUFACTURING GUIDELINES
- HARDENED GATE INSERTS (49-51) ARE RECOMMENDED WHEN USING SOFTER CAVITY STEELS. SOFTER CAVITIES MAY BE ACCEPTABLE FOR CERTAIN APPLICATIONS. CONTACT YOUR HUSKY REPRESENTATIVE WITH QUESTIONS.
- EDM'ING THE GATE AREA CAUSES MICRO CRACKS WHICH LEAD TO BRITTLE GATE FAILURES. ALSO - DO NOT EDM THE MOLDING SURFACE WITHIN 2mm OF THE GATE HOLE.
- MACHINE THE GATE HOLE AFTER HARDENING TO AVOID EXCESSIVE QUENCH IN THE THIN SECTION DURING HEAT TREAT & RESULTING OVERHARDENING IN THE GATE AREA.
- RECESSED GATES ON THE PRODUCT REDUCE THE GATE AREA STRENGTH LEADING TO GATE FAILURES.
- WELDING THE GATE AREA INCREASES STRESSES AT THE GATE, SOFTENS THE AREA AROUND THE WELD AND CAN CAUSE GATE FAILURES.

REV	DATE	DESCRIPTION	DESIGNED BY	CHECKED BY
4	2020-05-28	TABLE UPDATED PER LATEST CALCULATION	DRWINI DEEBAN N T	CHKD:1
3	2019-07-09	TEMPLATE VALUES UPDATED AS PER SOL 2.0	DRWINI MURALIDHARAN	CHKD:1
2	2018-04-06	DRAWING NAME CHANGED	DRWINI ANUSHAL	CHKD:1
1	2018-01-12	BL NOTE UPDATED	DRWINI DHANANLEYAN	CHKD:1
0	2017-09-12	ORIGINAL ISSUE - DESIGNED BY: DHANANLEYAN	DRWINI DHANANLEYAN	CHKD:1
			DRWINI PICHLER KLAUS	CHKD:1

DWT PER ASME Y14.5M-1994 AND HEAVY ADDENDUM - H254 BASIS: DIMENSIONS SPECIFIED UNLESS OTHERWISE SPECIFIED UNLESS OTHERWISE SPECIFIED ARE BASIC GENERAL TOLERANCES: METRIC: (M4) IMPERIAL: (G) (B) (Z) BROKEN EDGES/CHAMFER: 1 ± 0.2 X 45° 0.04 ± 0.01 X 45° FILLET/RADIUS: R0.8 ± 0.2 R0.03 ± 0.01 SURFACE FINISH: Ra 3.2	UNFINISHED DRAWING FEATURES MATERIAL: N/A FINISH/TREATMENT:	METRIC HUSKY TITLE: Single Cavity SCVG U350-SCVG-VG SCALE: 1:1 SHEET: 1 OF 2 AOR: 8146855 REV: 0
--	---	---

ASSEMBLY DRAWING

REV 0
8146855

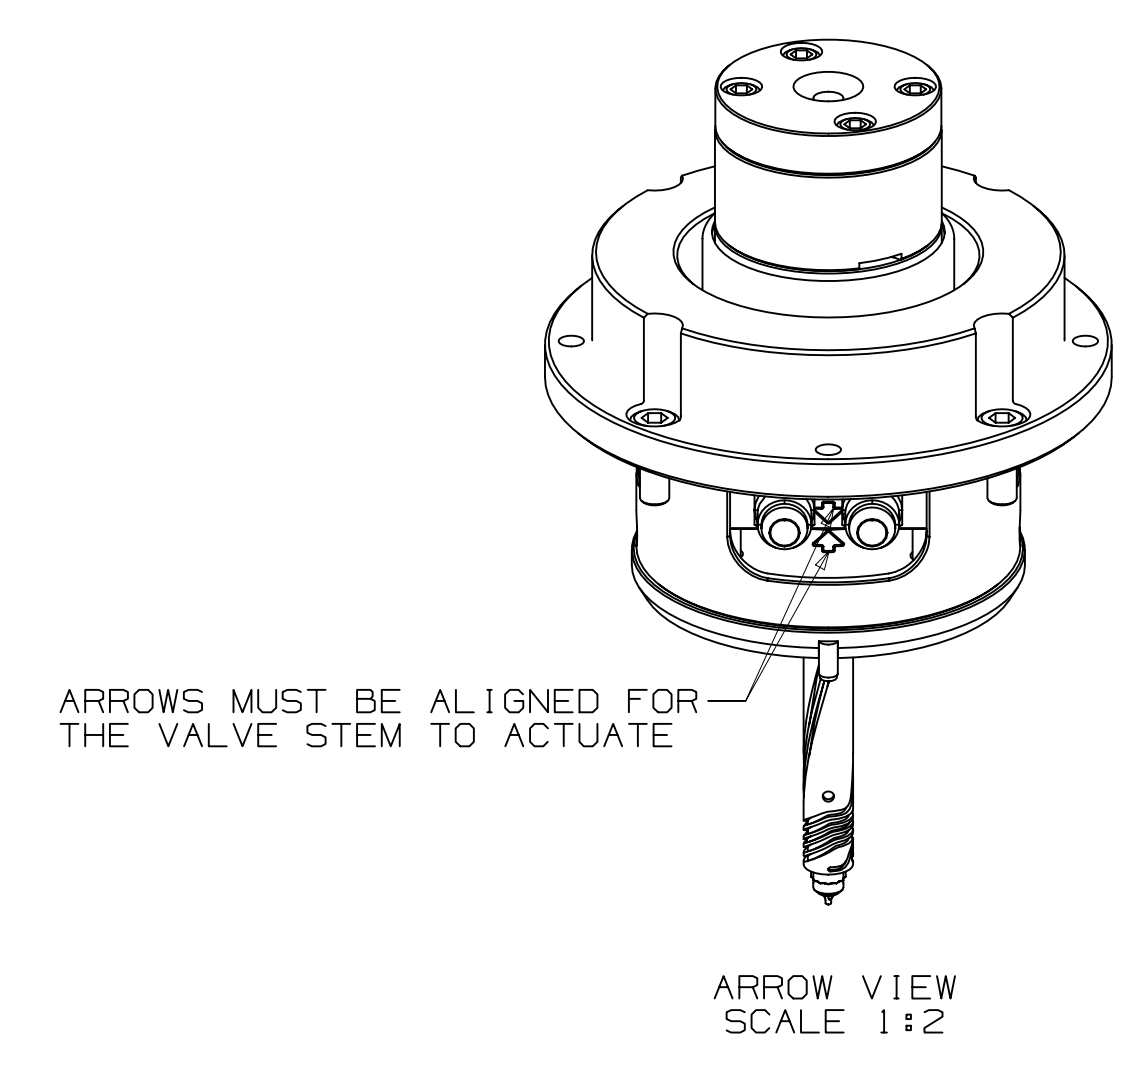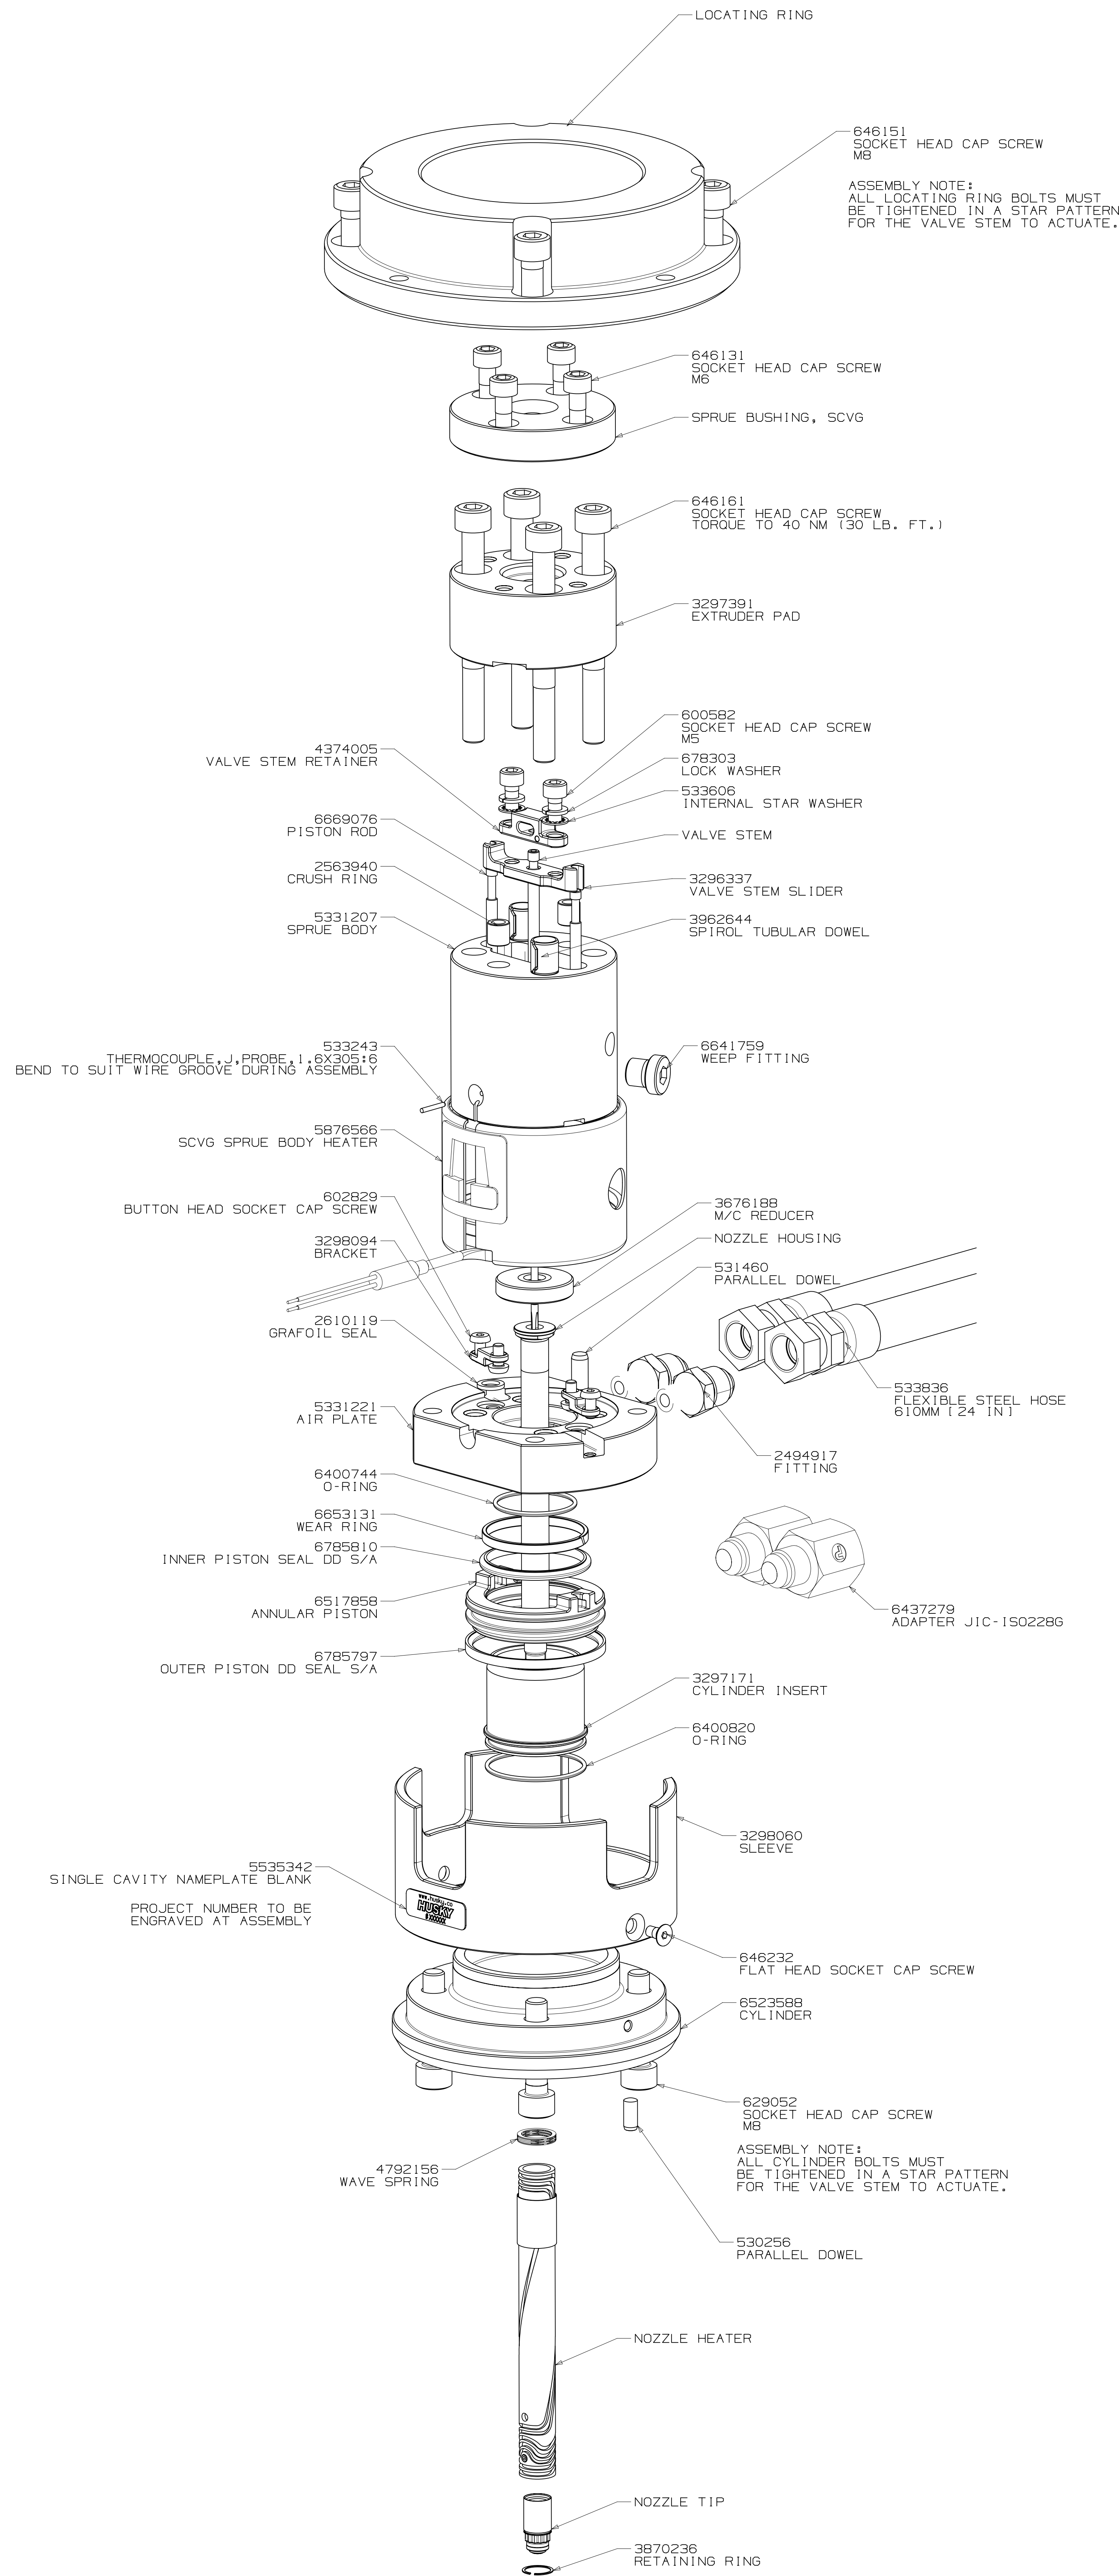

FLEXIBLE STEEL HOSE HAS:		
METRIC		
3/8-ISO 228 G		
FEMALE THREAD ADAPTER		
UNLESS OTHERWISE SPECIFIED TORQUE TO HUSKY SPECIFICATION HS 252		
PRELOAD CLASS HGT-80		
SIZE	Nm	lb-ft
#8	5	4
#10	7	5
1/4	16	12
5/16	25	18
3/8	35	26
7/16	50	37
1/2	70	52
5/8	100	74
3/4	150	110
7/8	200	148
1	250	184
1 1/8	350	258
1 1/4	450	332
M4	4.0	3.0
M5	5.0	3.7
M6	6.0	4.4
M8	10.0	7.4
M10	15.0	11.0
M12	20.0	14.8
M14	25.0	18.4
M16	35.0	25.8
M20	50.0	36.8
M25	75.0	55.1

VALVE STEM STROKE IS 7.3 (.29)	
ELECTRICAL INFO (240 VAC)	
ZONE	ZONE DESCRIPTION
1	SPRUE BODY
2	NOZZLE TIP
T/C LEADS: WHITE = (+) RED = (-)	

RECOMMENDED GATE COOLING GUIDELINES
ADEQUATE COOLING IS ESSENTIAL FOR THE PROPER FUNCTION OF THIS SYSTEM. REFER TO THE HOT RUNNER PRODUCT GUIDE www.husky.ca FOR MORE DETAILED GUIDELINES.

RECOMMENDED GATE MATERIAL
NOTE: THESE MATERIALS MAY NOT OFFER THE DESIRED RESISTANCE TO ABRASIVE AND/OR CORROSIVE RESINS, FILLERS AND/OR ADDITIVES
AISI H13 (49-51 Rc)
AISI 420 (49-51 Rc)

RECOMMENDED GATE MANUFACTURING GUIDELINES
- HARDENED GATE INSERTS (49-51) ARE RECOMMENDED WHEN USING SOFTER CAVITY STEELS. SOFTER CAVITIES MAY BE ACCEPTABLE FOR CERTAIN APPLICATIONS. CONTACT YOUR HUSKY REPRESENTATIVE WITH QUESTIONS.
- EDM'ING THE GATE AREA CAUSES MICRO CRACKS WHICH LEAD TO BRITTLE GATE FAILURES. ALSO - DO NOT EDM THE MOLDING SURFACE WITHIN 2mm OF THE GATE HOLE.
- MACHINE THE GATE HOLE AFTER HARDENING TO AVOID EXCESSIVE QUENCH IN THE THIN SECTION DURING HEAT TREAT & RESULTING OVERHARDENING IN THE GATE AREA.
- RECESSED GATES ON THE PRODUCT REDUCE THE GATE AREA STRENGTH LEADING TO GATE FAILURES.
- WELDING THE GATE AREA INCREASES STRESSES AT THE GATE, SOFTENS THE AREA AROUND THE WELD AND CAN CAUSE GATE FAILURES.

REV	DATE	DESCRIPTION	NAME
4	2020-05-28	TABLE UPDATED PER LATEST CALCULATION	DRWINI DEEBAN N T
3	2019-07-09	TEMPLATE VALUES UPDATED AS PER SOL. 2.0	DRWINI MURALIDHARAN
2	2018-04-06	DRAWING NAME CHANGED	DRWINI ANUSHAL
1	2018-01-12	BL NOTE UPDATED	DRWINI DHANALEYAN
0	2017-09-12	ORIGINAL ISSUE - DESIGNED BY: DHANALEYAN	DRWINI DHANALEYAN
			DRWINI PICHLER KLAUS

UNFINISHED DRAWING FEATURES	METRIC	HUSKY
MATERIAL: N/A	SCALE: 1:1	TITLE: SCVG
FINISH/TREATMENT	SCALE: 1:1	TITLE: Single Cavity Valve Gate
WEIGHT: - kg	SCALE: 1:1	TITLE: U350-SCVG-VG
	SCALE: 1:1	TITLE: 8146855
	SCALE: 1:1	TITLE: 0